

ANALOGUE OUTDOOR CLOCK

METROLINE

An attractive range of outdoor clocks in aluminum lightweight housing, conceived in a modular design adequate for outdoor applications including metros/railways. The most up-to-date technology guarantees reliable operation and maximum accuracy.



6 STEPS TO YOUR METROLINE

To make sure your Metroline meets all your requirements, you can assemble the components individually. Naturally, our experts will be happy to help.

1. Are you looking for an illuminated clock?

ILLUMINATION

The Metroline is available with or without illumination:

| CODE | ILLUMINATION |
|------|--------------|
| ML0 | none |
| ML2 | LED |

2. How big does your clock need to be?

SIZE

The Metroline is available in three dial diameters. The reading distance varies depending on the dial, lighting, etc. The viewing angle is 160 degrees.

| ∅ | READING DISTANCE |
|-------|------------------|
| 50 cm | 55-60m |
| 60 cm | 65-70m |
| 80 cm | 85-90m |



3. What shape would you like?

SHAPE

The Metroline is available in single-sided and double-sided versions:

| CODE | SHAPE |
|------|---------------------|
| R1 | round, single-sided |
| R2 | round, double-sided |

4.

The Metroline analog clock offers a variety of time code variants. Pick yours:

TIME CODE

| Code | Time code | Ø | Power supply | Hands | Movement | Max. power consumption | Accuracy (synchronized) | Loss of signal |
|---|------------------------|-------|--|-------|----------------------------|---|--------------------------|--|
| MOBALINE SELF-SETTING: MXX | | | | | | | | |
| M16 | MOBALine | 50-80 | MOBALine | h/m | SAM 100t | < 20mA @ >17VAC (0.34W) | <+/- 100ms | MOBALine: 12:00 position after 24 hours |
| M18 | MOBALine | 50-80 | MOBALine | h/m/s | SEM 100t | < 30mA @ >17VAC (0.51W) | <+/- 100ms | DCF active: 12:00 position after 7 days |
| NTP (LAN) SELF-SETTING (WITH UNICAST AND MULTICAST): NXX | | | | | | | | |
| N11 | NTP | 50-80 | PoE | h/m | NBU 190t PoE | PoEclass 2: <1.6W ³ / <3.2W ⁴ | <+/- 50ms | 12:00 position after 24 hours |
| N13 | NTP | 50-80 | PoE | h/m/s | NBU 190t S PoE | | | |
| N01 | NTP | 50-80 | 230V (24VDC) | h/m | NBU 190t 24 + PS24 | < 60mA @ 24VDC (<1.44W) | <+/- 50ms | 12:00 position after 24 hours |
| N03 | NTP | 50-80 | 230V (24VDC) | h/m/s | NBU 190t S 24 + PS24 | | | |
| POLARIZED IMPULSES: IXX | | | | | | | | |
| I02 | Min. impulse | 50-80 | 12-60V impulse | h/m | NU 90t | -6mA @ 24VDC (0.14W) | - | Standstill |
| I06 | Min. impulse | 50-80 | 12-60V impulse | h/m/s | NU 90t SYN | 6mA @ 24VDC (0.14W) 10mA @ 230VAC (<2W) | - | Standstill |
| I21 | Min. impulse | 50-80 | 12-60V impulse ^e 45-265VAC | h/m/s | IBU 190t S | 30mA @ 230VAC (<6.9W) | - | Standstill |
| SERIAL: SXX | | | | | | | | |
| S01 | Serial | 50-80 | 230V | h/m | SU 190t 230 | 50mA @ 24VDC (<1.2W) | <+/- 100ms | 12:00 position after 24 hours |
| S03 | Serial | 50-80 | 230V | h/m/s | SU 190t S 230 | 12mA @ 230VAC (<3W) | | |
| IRIG/AFNOR: TXX | | | | | | | | |
| T51 | IRIG/AFNOR | 50-80 | 230V | h/m | ATBU 190t 230 | 10mA @ 230VAC (<2.3W) | <+/- 100ms | 12:00 position after 24 hours |
| T53 | IRIG/AFNOR | 50-80 | 230V | h/m/s | ITBU 190t S 230 | | | |
| GPS / DCF 77 / MSF / WTD WIRELESS TIME DISTRIBUTION: RXX | | | | | | | | |
| R01 | DCF / MSF ² | 50-80 | 230V | h/m | BU 190t 230 | 230VAC (<3W) | <+/- 100ms | 12:00 position after 7 days |
| R04 | DCF / MSF ² | 50-80 | 230V | h/m/s | BU 190t S 230 | | | |
| R26 | DCF 77 ¹ | 50-80 | Lithium battery | h/m | FU 192t | - | <+/- 100ms | 12:00 position after 7 days |
| R29 | DCF 77 ^{1,5} | 50-80 | Lithium battery | h/m | FU 192t + BU 192t + CC | - | <+/- 100ms | 12:00 position after 7 days |
| R30 | DCF 77 ¹ | 50-80 | Lithium battery | h/m | BU 192t + AD 192.5 | - | <+/- 100ms | 12:00 position after 7 days |
| R31 | DCF 77 ^{1,5} | 50-80 | Lithium battery | h/m | 2x BU 192t + AD 192.5 + CC | - | <+/- 100ms | 12:00 position after 7 days |
| R51 | GPS ⁶ | 50-80 | Lithium battery | h/m | GU 192t V2 | - | <+/- 200ms | 12:00 position after 53 days |
| R54 | GPS ^{5,6} | 50-80 | Lithium battery | h/m | GU 192t V2 + BU 192t + CC | - | <+/- 200ms | 12:00 position after 53 days |
| QUARTZ: QXX | | | | | | | | |
| Q02 | Quartz | 50-80 | Lithium battery | h/m | QU 192t | - | <+/- 4min/y ⁷ | - |
| Q03 | Quartz ⁵ | 50-80 | Lithium battery | h/m | QU 192t + BU192t + CC | - | <+/- 4min/y ⁷ | - |
| CLOCK CONTROLLER (WITH ILLUMINATION CONTROL): CXX | | | | | | | | |
| C01 | MOBALine | 50-80 | 230 VAC | h/m | SAM 100t + DCC | 0.55A @ >230VAC (<20W) | <+/- 100ms | MOBALine: 12:00 position after 24 hours |
| C03 | MOBALine | 50-80 | 230 VAC | h/m/s | SEM 100t + DCC | | | |
| C09 | NTP | 50-80 | 230 VAC/PoE | h/m | SAM 100t + NCC | 0.55A @ >230VAC (<20W) PoE, class 4, <22W | <+/- 100ms | DCF active: 12:00 position after 7 days |
| C11 | NTP | 50-80 | 230 VAC/PoE | h/m/s | SEM 100t + NCC | | | |

¹ internal antenna and receiver (only for clocks without illumination) ² without antenna, external antenna required ³ single-sided clock
⁴ cascaded double-sided clock ⁵ for double-sided clocks, cascading cable included ⁶ mini magnetic antenna and receiver ⁷ without synchronization

For special clockwork/time code variants, see document TE-800800 at www.mobatime.com in the Customers section

5.

Choose your dial:

DIAL



dial 120



dial 300



dial 315

6.

Choose your installation:

INSTALLATION




00
Wall mounting (E)
 For single-sided clocks.



10
Wall bracket (WA)
 For double-sided clocks.



20
Ceiling suspension (DA)
 For double-sided clocks.

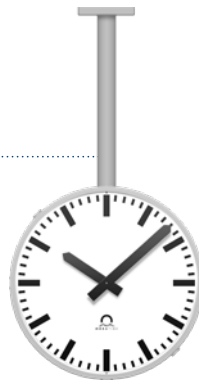

21 / 22 / 23
 21: Ceiling suspension Ø50 (DA500)
 22: Ceiling suspension Ø60 (DA600)
 23: Ceiling suspension Ø80 (DA800)
 For double-sided clocks.



30
Central pole mounting (ZM)
 For double-sided clocks.



50
Socket mounting (S)
 For double-sided clocks.

General properties

The following properties apply to all Metroline clocks:

| | |
|--------------------|----------------------|
| Cover glass | Acrylic glass |
| Housing | Aluminium (RAL 9006) |

YOUR METROLINE IS COMPLETE

You can now order your Metroline and calculate the corresponding code. Enter the abbreviation for each component of your choice in the bright field and find your Metroline code. It serves as the order code or as the foundation for further steps.

| | | |
|------------------------|------|-----------------------------------|
| 1. Illumination | Code | <input type="text"/> |
| 2. Size | Ø cm | <input type="text"/> |
| 3. Shape | Code | <input type="text"/> |
| 4. Time code | Code | <input type="text"/> |
| 5. Dial | Code | <input type="text"/> |
| Glass type | Code | <input type="text" value="1"/> |
| 6. Installation | Code | <input type="text"/> |
| Sequence number | Code | <input type="text" value="0000"/> |

Example order code



| | | | | | |
|------------------------------|-----------|---------------------|-------------------|-----------|---|
| 1. | 2. | 3. | 4. | 5. | 6. |
| ML0. | 60. | R1. | M16. | 315. | 1. 00. 0000 |
| Metroline no illumination | Ø 60cm | round, single-sided | movement SAM 100t | dial 315 | acrylic glass ¹ wall suspension sequence number ² |

¹ standard, cannot be changed

² The sequence number denotes special versions (e.g. clocks with a special dial). When ordering, please indicate the sequence number with 0000 (standard version); we will adapt this for any special version. Special versions can be reordered at any time stating the sequence number.

STANDARDS

Depending on the movement used in your Metroline clock, the following standards apply:

| MOVEMENT(S) | STANDARDS |
|--|---|
| SAM 100t SEM 100t | 2011/65/EU / 2014/30/EU / 2014/35/EU / 2016/797/EU / EN 50121-4 / EN 60950-1 / EN 61000-6-2 / EN 61000-6-3 |
| NBU 190t PoE NBU 190t S PoE NBU 190t 24 NBU 190t S 24 | 2011/65/EU / 2014/30/EU / 2014/35/EU / 2016/797/EU / EN 50121-4 / EN 60950-1 / EN 61000-6-2 / EN 61000-6-4 |
| NU 90t NU 90t SYN | 2011/65/EU / 2014/30/EU / EN 61000-6-2 / EN 61000-6-3 |
| IBU 190t S | 2011/65/EU / 2014/30/EU / 2014/35/EU / 2016/797/EU / EN 50121-4 / EN 60950-1 / EN 61000-6-3 |
| SU 190t 230 SU 190t S 230 | 2011/65/EU / 2014/30/EU / 2014/35/EU / 2016/797/EU / EN 50121-4 / EN 60950-1 / EN 61000-6-1 / EN 61000-6-3 |
| ATBU 190t 230 ITBU 190t S 230 | 2011/65/EU / 2014/30/EU / 2014/35/EU / 2016/797/EU / EN 50121-4 / EN 60950-1 / EN 61000-6-2 / EN 61000-6-3 / IPPS |
| BU 192t FU 192t QU 192t | 2011/65/EU / 2014/30/EU / EN 61000-6-2 / EN 61000-6-3 |
| BU 190t 230 BU 190t S 230 | 2011/65/EU / 2014/30/EU / 2014/35/EU / 2016/797/EU / EN 50121-4 / EN 60950-1 / EN 61000-6-1 / EN 61000-6-3 |
| GU 192t V2 | 2011/65/EU / 2014/30/EU / 2016/797/EU / EN 50121-4 / EN 61000-6-2 / EN 61000-6-3 |

All Metroline clocks are compliant with CE, RoHS and REACH.

TECHNICAL DATA

| TECHNICAL DATA | METROLINE |
|----------------------|--|
| Operating conditions | -30 to +70 °C (0 to 95% relative humidity, non-condensing) |
| Degree of protection | IP 54 (option: IP 65*) |

* IP 66 available for bulk orders on special request

| Ø | E | | | | | | | WA/DA/DAxxx/ZM/S | |
|----|-----|-----|-----|-----|-----|-----|--------|------------------|--------|
| | A | B | C | D | E | F | Weight | G | Weight |
| 50 | 534 | 500 | 190 | 95 | 330 | 190 | 6.8 | 500 | 12 |
| 60 | 634 | 600 | 230 | 115 | 400 | 230 | 8.0 | 600 | 14 |
| 80 | 834 | 800 | 300 | 150 | 520 | 300 | 11.0 | 800 | 18 |

All dimensions in mm and weights in kg.

